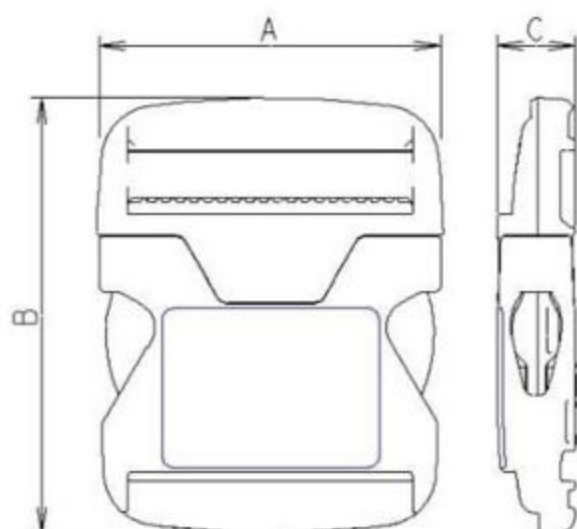


ITEM LB50XDATE 27-Mar-20**YKK[®]****Fastening Products
PRODUCT DATA SHEET****DIMENSIONS**

	(MM)	(INCH)
A	29.3	1.17
B	48.6	1.94
C	10.2	0.41

(All tolerance are within $\pm 0.2\text{mm}$ or $0.02''$)**MANUFACTURED BY**

YKK TAIWAN

MATERIAL

POM

UNIT WEIGHT

31.5 g/pc

AVERAGE STRENGTH

(Tested at YKK Japan in accordance to ASTM D76-99 at 70F°, 20C°)

	Newton (N)	Pound (LB)
Break Strength(ave.)	1,159	261.1

(Note) Utilized PA Webbing N0015

MISCELLANEOUS

Material Melting Point	Polyamide :	220 °C	428 F°
------------------------	-------------	--------	--------

(Notice - Disclaimer)

Any information contained herein is for the sole purpose of providing purchaser with general knowledge about YKK products. YKK does not make any warranty of kind, neither express or implied, as to the product's average strength. Depending on the situation, place of production may be changed. We will update you when any change is made. Letter on the backside of the product indicates the place of the production, "T" is produced in YKK TAIWAN, "G" in YKK SHENZHEN and "V" in YKK VIETNAM.