


Quality NO:	9124F		
Fabric Composition	97/3% PA/Elastan		
Weave / Threading	1/1		
Labels	Cordura		
Finish	DWR		
	Number of Threads / cm		Yarns
Warp	26		370dtex PA
Weft	23		270 dtex PA/44 dtex Elastan
Usable width (cm)	140		
SS-EN 1773			
Weight (g/m2)	190	+/-5%	
SS-25 12 69			
Colour Fastness			
Washing 40 °C	4		
SS-EN 20 105-C06			
Water	4		
SS-EN ISO 105-E01			
Light	3-5	Depends on shade	
SS-ISO 105-B02			
Dry rubbing	4		
Wet rubbing	4		
EN ISO 105-X12			
Colour Match to standard			
Shrinkage after washing (%)	warp	2	
SS-EN ISO 6330	weft	4	
Breaking strength (N/5cm)	warp	1500	
SS-EN ISO 13934-1:1999	weft	800	
Tear strength (N)	warp	100	
SS-EN ISO 13937-2	weft	70	
Seam slippage (N)	warp	250	
SIS 65 00 37	weft	200	
Stretch (%)		>35%	
Recovery (%)		>96%	
EN 14704-1:2005			
Pilling	7000 turns	4-5	
EN ISO 12945-2			
Abrasion (r)		300000	
EN ISO 12947-1:1998			
Spray	original		100
SS-EN 24920	after three washes tumbledried		90
Hydrostatic Head (mm)	original		200
SS-en 20811	after three washes tumbledried		200
Airpermeability (l/min/20cm2)			~5
SS-EN ISO 9237			

Washing Symbols

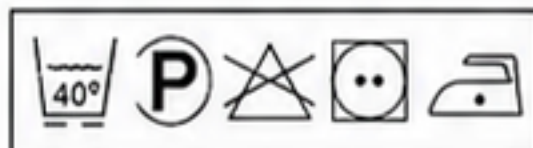

Schoeller Textil AG

St. Gallerstrasse 17
CH-9325 Roggwil
Switzerland
www.schoeller-textil.com